


Re-connect wiring for use with LED bulb

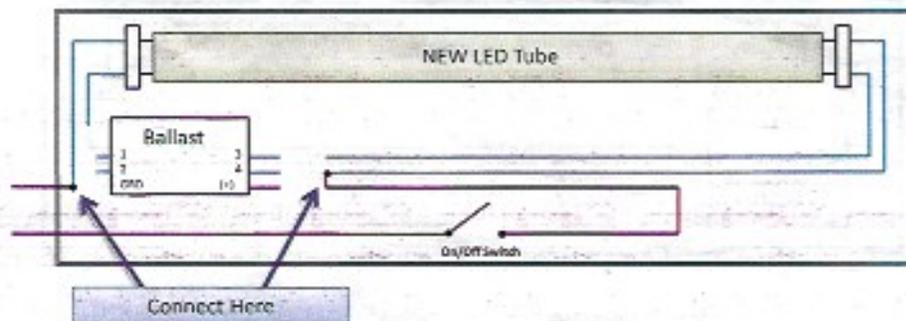

Step 6: Connect Ground wire to either Wire 1 or 2 as shown

Step 7: Connect Switch wire to either Wire 3 or 4 as shown

*NOTE: it makes no difference if you choose to connect the Ground wire to wire 3 or 4 instead, if they are more convenient. If you do so, just be sure to connect the Switch wire to either 1 or 2.*

Step 8: You may remove the two (2) unused wires going to the end sockets (the are no longer used)

Step 9: You may remove ballast if you prefer

Step 10: Insert LED tube (there is no polarity)

Step 11: Test lamp with power and re-assemble